

GENERAL:

The KeyForm-Slot aluminum system is designed to create grooved channels in the concrete parallel to the drain during the pour. This ensures the floor finished coating is at the accurate elevation and has optimum bonding with the drain. The system works seamlessly with all linear slot drains manufactured by FoodSafe Drains.


MATERIALS:

- Coated Aluminum

INSTALLATION:

The FoodSafe KeyForm-Slot shall be installed in accordance with the manufacturers installation instructions and recommendations.

TYPICAL PROFILE OF A KEYFORM FOR A SLOT DRAIN

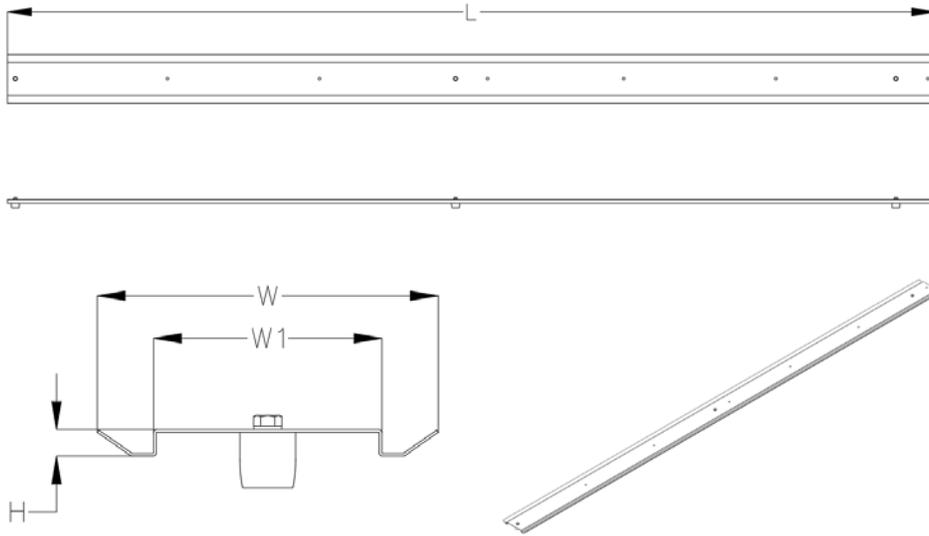

KEYFORM DESCRIPTION	PART NUMBER	SLOT WIDTH (mm)	LENGTH (mm)
KEYFORM ASSEMBLY, 13mm SLOT	KEYFORMS0-116	13	2946
KEYFORM ASSEMBLY, 25mm SLOT	KEYFORMS1-116	25	2946
KEYFORM ASSEMBLY, 32mm SLOT	KEYFORMS5-116	32	2946

Specifying engineer is responsible for concrete encasement and reinforcing based upon application and local codes. FoodSafe Drains reserves the right to change the product and specifications without notice.